


pivotica pro

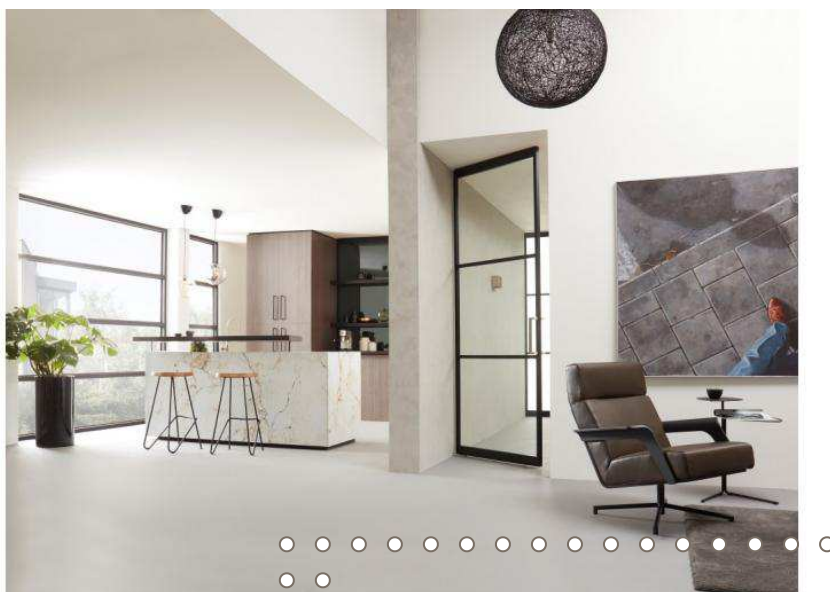

PIVOTICA PRO

GROUP:	invisible hinges
SORT:	wood, built-in
TYPE:	pivot
DOOR WEIGHT:	up to 150 kg
DOOR THICKNESS:	40 and 50 mm

Argenta's pivotica pro allows interior doors to be opened through 150° in both directions. Thanks to an active closure damper, the door always returns to its zero position. This keeps the door perfectly flush with the wall. An optional 90° holding position can also be set, allowing the door to stay open in both directions.

[BROCHURE INVISIBLE HINGES](#)

[CONTACT US](#)

WHAT MAKES PIVOTICA PRO SO UNIQUE?



Ease of use

Installation:

- Easy to install with free choice of pivot point
- Two different installation methods: surface-mounted or built-in

Adjustable: the floor plate can be set to perfectly align the door with the wall

Opening angle: pivotica pro has an opening angle of 150° in both directions and is available with a holding position at 90° or 0°. The speed of the automatic door closing system is also adjustable



Aesthetics

Design: no visible adjustment and fastening screws as the hinge is almost fully integrated in the door

Architectural: minimalist look as the door closer is invisible. Also suitable for floor-to-ceiling doors

Finish: the cover plates for both the hinge and the floor plate are available in black and white



Technical

Application: pivotica pro can be used in both newbuild and renovation projects. In addition, it can be combined with underfloor heating: thanks to the simple installation of the foot plate at a minimum depth, pivotica pro never comes into contact with the underfloor heating system

TECHNICAL FEATURES

	pivotica pro 100 FM*	pivotica pro 150 FM*	pivotica pro 100 BI**	pivotica pro 150 BI**
Door weight	max. 100 kg	max. 150 kg	max. 100 kg	max. 150 kg
Door thickness	min. 40 mm max. 100 mm	min. 50 mm max. 100 mm	min. 40 mm max. 100 mm	min. 50 mm max. 100 mm
Door width ¹	2000 mm	< 100 kg = 2500 mm > 100 kg = 2000 mm	2000 mm	< 100 kg = 2500 mm > 100 kg = 2000 mm
Door height	3000 mm	3000 mm	3000 mm	3000 mm
Width adjustment	- 3 / + 3 mm	- 3 / + 3 mm	- 3 / + 3 mm	- 3 / + 3 mm
Depth adjustment	- 3 / + 3 mm	- 3 / + 3 mm	- 3 / + 3 mm	- 3 / + 3 mm
Height adjustment	/	/	+ 6 mm	+ 6 mm
Alignment	-4 / + 4 °	-4 / + 4 °	-4 / + 4 °	-4 / + 4 °
Holding position	0° (= F0) - 90° / 0° / 90° (= F90)	0° (= F0) - 90° / 0° / 90° (= F90)	0° (= F0) - 90° / 0° / 90° (= F90)	0° (= F0) - 90° / 0° / 90° (= F90)
Bottom door clearance	13 mm	13 mm	min. 5 mm max. 11 mm	min. 5 mm max. 11 mm

* = floor mounted

** = built in

¹ with a central position

TECHNICAL DOCUMENTS

Download here all technical documents such as specification sheets, manuals, certificates and technical drawings.

PIVOTICA PRO 100

PIVOTICA PRO 150