



NON-MAGNETIC TOUCH LATCH



MC-37

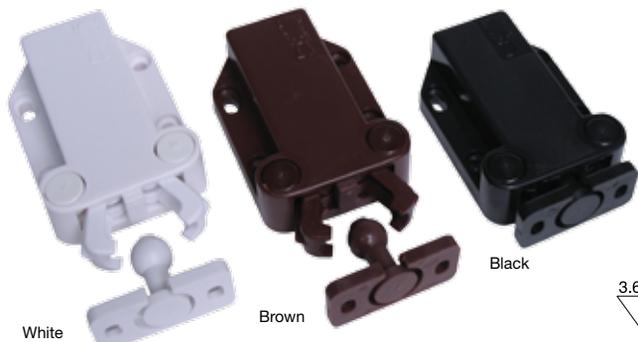

- Push to latch/unlatch.
 - Strong retaining force.
 - Floating strike allows for easy alignment.
 - Note : For overlay door, allow 3 mm (1/8") gap between door and cabinet frame for push space.
- Pulling the door with excessive force without unlatching the unit may damage the mechanism.
Constant loading of over 4 kgf or excessive pushing or pulling is not recommended.

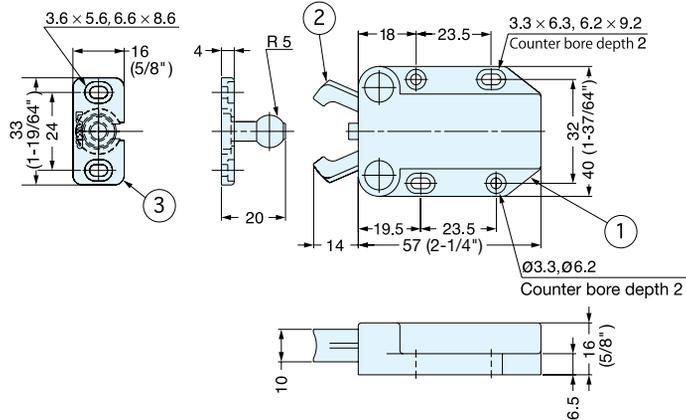

Item No.	Retaining Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)	No.	Part Name	Material	Color
MC-37/BLK-1	8 (17.6 lbs)	24	30	300	①	Body	ABS	Black (BLK)
MC-37/BRN-1					②	Arm	Polyacetal	Brown (BRN)
MC-37/WHT-1					③	Strike	Polyamide	White (WHT)



DAMPER CATCH



DC



- Catch with built-in damper, closes doors smoothly.
- Slim design suitable for various inset and overlay door installations.
- Available for both wood and glass cabinet doors. Glass face plate SDS-50G sold separately.
- Includes screws.
- Non-handed: can be installed on left or right side.

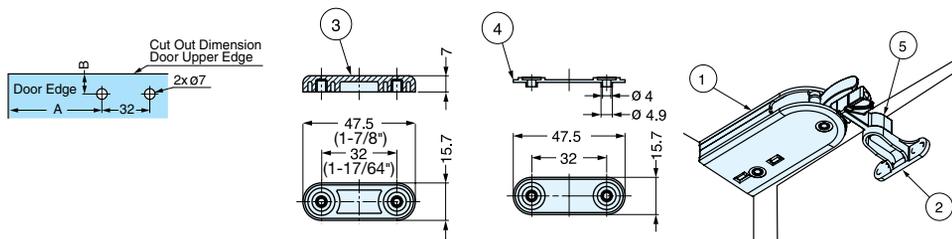

■ Face Plate (Sold Separately)

Item No.	Weight (g)	Box (pcs)
SDS-50G-CR	25	50

No.	Part Name	Material	Finish/Color
①	Body	Polyacetal (POW)/PBT	Dark Grey/Light Grey
②	Trigger	Polyacetal (POW)	Dark Grey
③	Face Plate	Zinc Alloy (ZDC)	Chrome
④	Spacer	ABS	Black
⑤	Trigger Installation Jig	PBT	Light Grey

Item No.	Spec.	Door With (mm)	Door Height (mm)	Door Thickness (mm)	Door Weight (kg)	Weight (g)	Box (pcs)	Carton (pcs)
DC-90	For Wooden Door	450 (17-23/32")	600 (23-5/8")	-	4 (8.8 lbs)	46	25	200
DC-90G	For Glass Door			5		71		
DC-100	For Wooden Door	600 (23-5/8")	800 (31-1/2")	-	7 (15.4 lbs)	66		
DC-100G	For Glass Door			5		91		