



NON-MAGNETIC TOUCH LATCH



MC-28

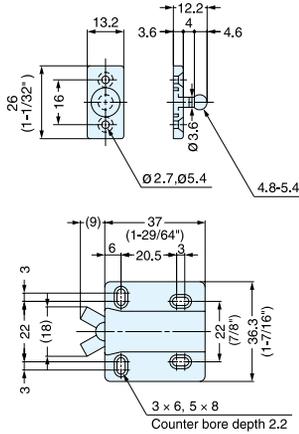

- Push to latch/unlatch.
- Touch latch with floating strike allows for easy alignment.
- Note: For overlay door, allow 3 mm (1/8") gap between door and cabinet frame for push space. Pulling door with excessive force without unlatching the unit may damage the mechanism. Constant loading of over 3kgf or excessive pushing or pulling is not recommended.




Item No.	Retaining Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
MC-28/BLK	3 (6.6 lbs)	15	50	500

Material	Color
ABS	Black


NON-MAGNETIC TOUCH LATCH



PR-21P/BLK

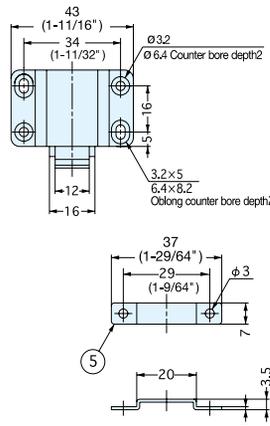

- Push to latch/unlatch.
- Strong retaining force.

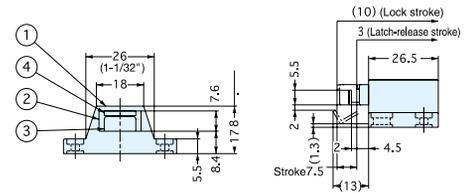


Item No.	Retaining Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
PR-21P/BLK	10 (22 lbs)	16.3	100	800

No.	Part Name	Material	Finish/Color
①	Housing	ABS	Black
②	Slide	Polyacetal	
③	Arm	Steel	Brown
④	Yoke		GB
⑤	Strike		Chromate




NON-MAGNETIC TOUCH LATCH (SNAP-IN TYPE)



PR-3PK

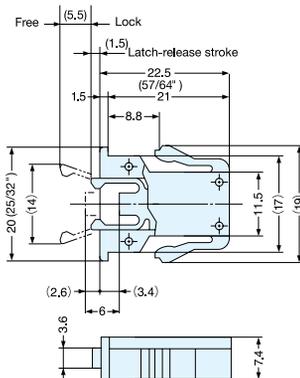

- Push to latch/unlatch.
- Thin design is ideal for tight spaces.
- Strike/counterplate not available.



Item No.	Retaining Force (kg)	Weight (g)	Box (pcs)	Carton (pcs)
PR-3PK	2.2 (4.8 lbs)	2.5	400	4000

Material	Color
ABS	Black